



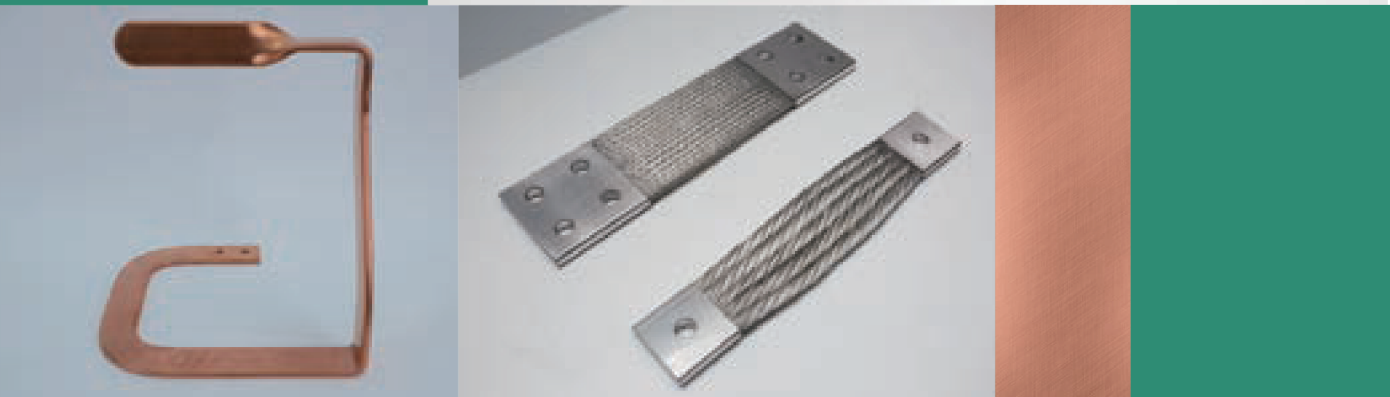

宏于電機
HORNGYU ELECTRIC



COPPER ROPED CONNECTORS

軟銅帶

絞線型：鍍錫銅絞線組成，
兼具吸震與可撓之特性。





規 格	試驗電流 (A)	導體面積 (mm ²)	截面積 (A/mm ²)
6TX37WX260L	382	100	3.82
6TX43WX280L	450	125	3.60
6TX58.7WX300L	612	175	3.50
6TX67WX320L	680	200	3.40
6TX80WX360L	650	200	3.25
10TX30WX260L	573	150	3.82
10TX40WX280L	715	200	3.58
10TX50WX300L	875	250	3.50
10TX60WX320L	1000	300	3.33
10TX80WX360L	1300	400	3.25
10TX100WX400L	1650	500	3.30
10TX120WX400L	1920	600	3.20
10TX150WX400L	2200	750	2.93
10TX180WX400L	2400	600	4.00
10TX200WX400L	2400	650	3.69
13TX53WX300L	1050	300	3.50
13TX63WX320L	1250	375	3.33
13TX80WX360L	1700	525	3.24
13TX104WX400L	1980	600	3.30
13TX124WX400L	2400	750	3.20
13TX153WX400L	2700	900	3.00
14TX174WX400L	2650	975	2.72
14TX200WX400L	3100	1125	2.76

軟銅帶

COPPER BRAIDED CONNECTORS


編織型：鍍錫編織銅線組成，具備吸震特性，可應用微偏移需求。




W寬(mm)	T厚(mm)	截面積(mm ²)	參考電流(A)
40	5	100	420
	10	200	715
	12	250	844
	15	300	956
50	5	150	582
	10	225	875
	12	300	1080
	15	375	1277
60	5	190	700
	10	285	1000
	12	380	1254
	15	475	1472
80	5	200	672
	10	400	1300
	12	500	1526
	15	600	1716
100	5	300	1097
	10	450	1650
	12	600	2044
	15	750	2409
120	5	380	1276
	10	570	1920
	12	760	2401
	15	950	2812
150	5	450	1397
	10	675	2100
	12	900	2619
	15	1125	3055
180	10	570	1977
	13	855	2897
200	10	600	2073
	13	900	3072



應用實例

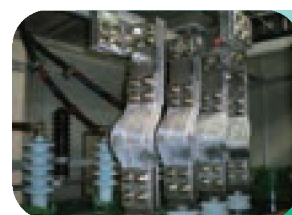

變壓器引出

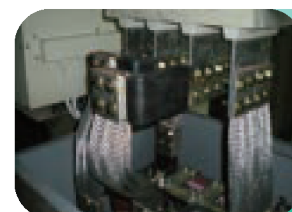


發電機引出



23876

新北市樹林區武林街2之3號

T 02-26818008 **F** 02-26816006

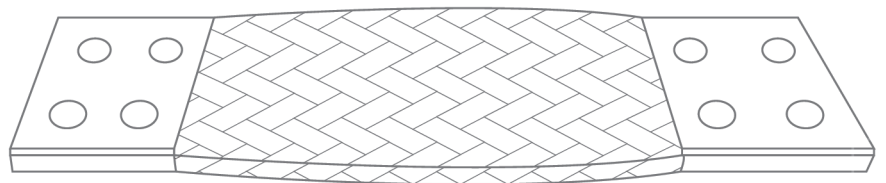

www.horngyu.com